




JD1-A快装法兰式精密过滤器

JD1-A Quickly Flange Cartridge Filter Housing

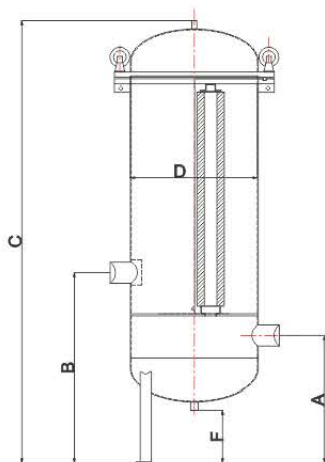

参数概述/General Specifications

- 1、材质SUS304， SUS316L；
- 2、最大工作压力150Psi；
- 3、快装法兰；带腿、平压、或带钢碗插件；
- 4、表面抛光处理或亚光处理。

- 1、Material:SUS304,SUS316L;
- 2、Max working pressure 150Psi;
- 3、Quickly Flange Type,With legs, With SS cup or not;
- 4、Polished or sandblast external surface.

尺寸/Dimension

型号/Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	Inlet/ Outlet	Drain
JD1-A-Φ170x3X10"	260	450	725	Φ170	125	1",1 1/2"	1/4"
JD1-A-Φ170x3X20"	260	500	980	Φ170	125	1",1 1/2"	1/4"
JD1-A-Φ170x3X30"	260	500	1235	Φ170	125	1",1 1/2"	1/4"
JD1-A-Φ170x3X40"	260	500	1490	Φ170	125	1",1 1/2"	1/4"
JD1-A-Φ200x5X20"	260	500	995	Φ200	125	1" ; 2"	1/2"
JD1-A-Φ200x5X30"	260	500	1250	Φ200	125	1" ; 2"	1/2"
JD1-A-Φ200x5X40"	300	600	1500	Φ250	125	1" ; 2"	1/2"
JD1-A-Φ250x7X20"	300	600	1020	Φ250	125	1" ; 2"	1/2"
JD1-A-Φ250x7X30"	300	600	1275	Φ250	125	1" , 2 1/2"	1/2"
JD1-A-Φ250x7X40"	320	600	1530	Φ250	125	1" , 2 1/2"	1/2"
JD1-A-Φ300x9X30"	320	600	1300	Φ300	125	1" , 2 1/2"	1/2"
JD1-A-Φ300x9X40"	320	600	1550	Φ300	125	1" , 2 1/2"	1/2"
JD1-A-Φ350x15X30"	320	600	1325	Φ350	125	1" , 2 1/2"	3/4"
JD1-A-Φ350x15X40"	320	600	1580	Φ350	125	1" , 2 1/2"	3/4"